

Primary Tillage


# DOMINATOR® 4860



[www.KuhnNorthAmerica.com](http://www.KuhnNorthAmerica.com)



Invest in Quality®

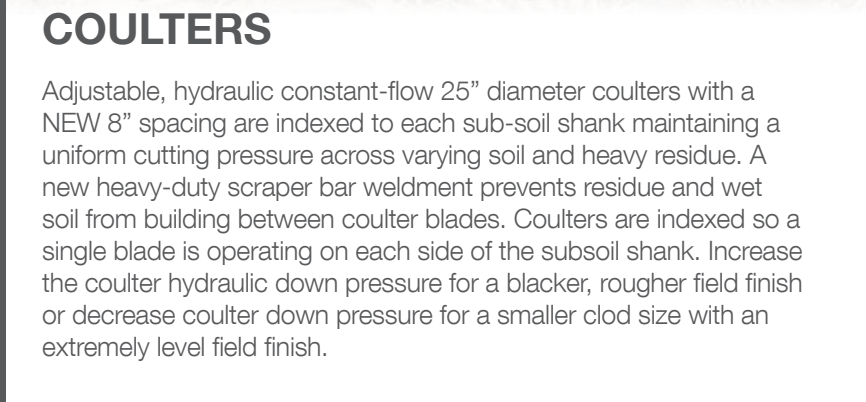

### MAXIMUM ACRES PER HOUR

Complementing our current Dominator® 4855, the NEW KUHN Krause Dominator® 4860 meets a specific product request voiced by growers searching for optimal tilled width productivity plus soil compaction maintenance.

### OPTIMAL PRODUCTIVITY

Wider cut widths and increased productivity were achieved by incorporating a 24" shank spacing and including additional "up-time" features, like constant-flow hydraulic coulters gangs, no-daily grease maintenance bearings, longer life Double K™ ripper points, a non-speed sensitive hydraulic rear disc conditioner and new hydraulic reel control.

### SUBSOIL MAINTENANCE

Compaction reduction and subsoil maintenance are accomplished through 3000 pound point load auto-reset subsoil shanks equipped with NEW Double K™ ripper points and a maximum operating depth of 16 inches.


## DOMINATOR® 4860 in brief

Models	Working Width	Number of Shanks	Weight (lbs / kg)
4860-7	14' / 4.3 m	7	18,483 / 8 384
4860-9	18' / 5.5 m	9	22,806 / 10 345
4860-11	22' / 6.7 m	11	31,240 / 14 170
4860-13	26' / 7.9 m	13	34,125 / 15 479

### COULTERS

Adjustable, hydraulic constant-flow 25" diameter coulters with a NEW 8" spacing are indexed to each sub-soil shank maintaining a uniform cutting pressure across varying soil and heavy residue. A new heavy-duty scraper bar weldment prevents residue and wet soil from building between coulters blades. Coulters are indexed so a single blade is operating on each side of the subsoil shank. Increase the coulters hydraulic down pressure for a blacker, rougher field finish or decrease coulters down pressure for a smaller clod size with an extremely level field finish.

### NO DAILY GREASE MAINTENANCE

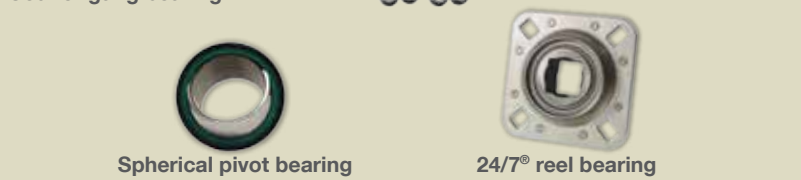

- No daily grease maintenance required for the coulters gang bearings, coulters gang pivots, wing fold, wheel lift and walking beam pivots, along with the rear disc conditioner blade bearings and optional 24/7® reel conditioner.
- Coulters bearings feature a Kuhn Krause exclusive two piece, nylon ring that secures the outer race of each coulters gang bearing and helps center the bearing within the housing, preventing potential preload and failure of the bearing.
- No-daily grease maintenance allows you to optimize your tilled acres per day by eliminating the time normally spent on greasing.



### SHANKS

- Subsoil shanks on 24" spacing provide optimum cut-widths for available horsepower per foot of cut.
- Double rank design allows for a minimum of 48" between adjoining shanks for maximum "no-plug" residue and soil flow.
- New shank pivot for the 3000 lb. subsoil shank improves shank alignment and performance.



### DOUBLE K™ POINTS

- Double the wear life of prior KUHN Krause Dominator® fabricated steel and carbide capped ripper points.
- Solid casting increases durability in rocky conditions.
- Heavy-duty, 26.5 pound, 7" cast chromium carbide wing ripper point.
- Heavy-duty 22 pound, 2.5" cast chromium carbide-straight ripper point.




### REAR DISC CONDITIONER

- Left and right sections of the rear disc conditioner are configured in a reverse tandem design that first moves soil inward, then outward in opposite directions, to aggressively mix and bury residue, size large clods and level the soil.
- Disc conditioner is hydraulically controlled with a lower limit adjustment valve.
- Uniform 12" spacing is maintained with individually mounted, 24" fluted, shallow concavity blades.
- Disc conditioner blade configuration offers a level field finish while functioning within a wide range of operating speeds.
- Individual rear disc conditioner blade assemblies use a proven sealed bearing with a 5-bolt hub for blade attachment.




### HEAVY-DUTY 24/7 CONDITIONING REEL


- Choice of heavy-duty round bar or heavy-duty flat bar reel with PEER® TILLXTREME™ maintenance free bearing assemblies mounted on heavy-duty ductile cast bearing arms.
- 24/7 conditioning reel performs final clod sizing and soil firming.
- Hydraulic control for reel lift is standard.
- NEW heavy-duty mounting arms handle the added weight of the rugged reel assemblies.

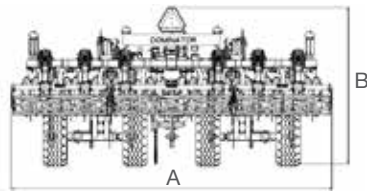

4860-7

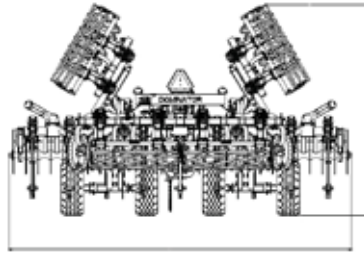

4860-9

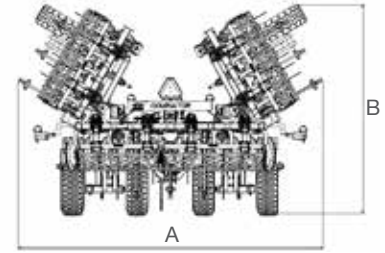

4860- 11 and 4860-13

**Model Specifications**

	4860-7	4860-9	4860-11	4860-13
<b>SPECIFICATIONS</b>				
A - Transport Width <sup>1</sup>	16'1" / 4.9 m	18'7" / 5.7 m	17'9" / 5.4 m	
B - Transport Height <sup>1</sup>	N/A	11'4" / 3.5 m	12'2" / 3.7m	13'6" / 4.1 m
Frame Type	Rigid	Folding Rear Conditioner	Folding	Folding
Total Number of Shanks	7	9	11	13
RTK Working Width	14' / 4.3 m	18' / 5.5 m	22' / 6.7 m	26' / 7.9 m
Weight	18,483 lbs / 8 384 kg	22,806 lbs / 10 345 kg	31,240 lbs / 14 170 kg	34,125 lbs / 15 479 kg
<b>STANDARD EQUIPMENT</b>				
- Hitch	CAT IV Articulating Ball Hitch with 2" Pin Hole			
- Tongue	Rigid, Mechanical Adjustable, Self-Leveling Tongue			
- Depth Control	Single-point Hydraulic Depth Control			
- Hydraulics	Cylinders with Royal Plate Plus, Color Coded Hydraulic Hose Grips, All Hydraulic Hoses			
- Transport Locks and Safety	Hydraulic Valves, Transport and Wing Fold, High-Visibility LED Lighting, SMV Sign			
- Coulters Gangs	25" x 1/4" Smooth Coulters on 8" (20 cm) Spacing, Adjustable, Constant Flow Hydraulic, Heavy-Duty 6" Bell Diameter Ductile Iron Spools, 1-3/4" Diameter Round Alloy Tie Rod with Maintenance-Free PEER® TILLXTREME™ Bearings, C-Type Rock-Flex Bearing Arms 1-1/4" x 2-1/2"			
- Spring Reset Subsoil Parabolic Shanks	3,000 lb Point Load, 1-1/4" x 4" Shank Size with Wear Bar, 21" Trip Height, 39" Underframe Clearance, 16" Working Depth, Exclusive Kuhn Krause Double K™ 7" Winged Point			
- Main Frame Wheels	Four 360/65 R17.5 Metric Tires, Walking Beams, Slip-In Spindles, Maintenance-Free Spherical Bearings, 8-Bolt Heavy-Duty Hubs	Four 440/565 R18 Metric Tires, Walking Beams, Slip-In Spindles, Maintenance-Free Spherical Bearings, 8-Bolt Heavy-Duty Hubs		
- Wing Frame Wheels	N/A	One 360/65 17.5 per Wing, 8-Bolt Hubs		
- Hydraulic Adjust Rear Disc Conditioner	24" x 6 Gauge, Fluted Shallow Concavity Disc Blades, 12" Blade Spacing, Remote Single-Point Hydraulic Lower Limit Stop, Reversed Tandem Design			
<b>OPTIONAL EQUIPMENT</b>				
Hitch	CAT III Articulating Ball Hitch with		CAT V Articulating Ball Hitch Hitch for 2-3/4" Pin	
Tongue Type	Guardian Hitch™ (Cushion Tongue)		Mechanical Adjustable, Self-Leveling Tongue	
Points	Exclusive Double K™ 2-1/2" Cast Chromium Carbide Straight Point			
Soil Conditioning Reel	24/7® Soil Conditioning Reel with Float Position, Heavy-Duty Flat Bar Spiral Reels, PEER® TILLXTREME™ Maintenance-Free Bearing with or without Hydraulic Lift			
Rear Attachment Hitch	For Use on Machines without 24/7® Soil Conditioning Reel			
<b>OPERATING INFORMATION</b>				
Recommended Speed of Operation	4 - 7 mph / 6 - 11 km/h			
Recommended Working Depth	8" - 16" / 20 cm - 40 cm			
Recommended Tractor Power Range PTO hp / kW <sup>2</sup>	210 - 280 / 157 - 209	270 - 360 / 201-268	330 - 440 / 246 - 328	390 - 520 / 291 - 388

<sup>1</sup> Approximate transport width, height and weight shown with optional finishing attachments.  
<sup>2</sup> Estimates only. Horsepower requirements will vary by geography and soil type.  
 N/A - Not Applicable

For more information about your nearest KUH N Krause dealer and other KUH N Krause products, visit our website

[www.KuhnNorthAmerica.com](http://www.KuhnNorthAmerica.com)

**KUH N KRAUSE, INC.**

305 South Monroe Street  
 P.O. Box 2707  
 Hutchinson, KS 67504



Visit our YouTube channel to watch our latest product videos.



Your KUH N Krause dealer

Information given in this document is only for informational purposes and is non-contractual. Our machines are in compliance with North American safety standards. In our literature, and for improved illustration of certain details, some safety devices may not be in operating position. When operating these machines, these devices must be operated in accordance with the requirements indicated in the operator's manuals and assembly manuals. We reserve the right to change any designs, specifications or materials listed without further notice. Machines and equipment in this document can be covered by at least one patent and/or registered design. Trademarks cited in this document may be registered in one or several countries.

